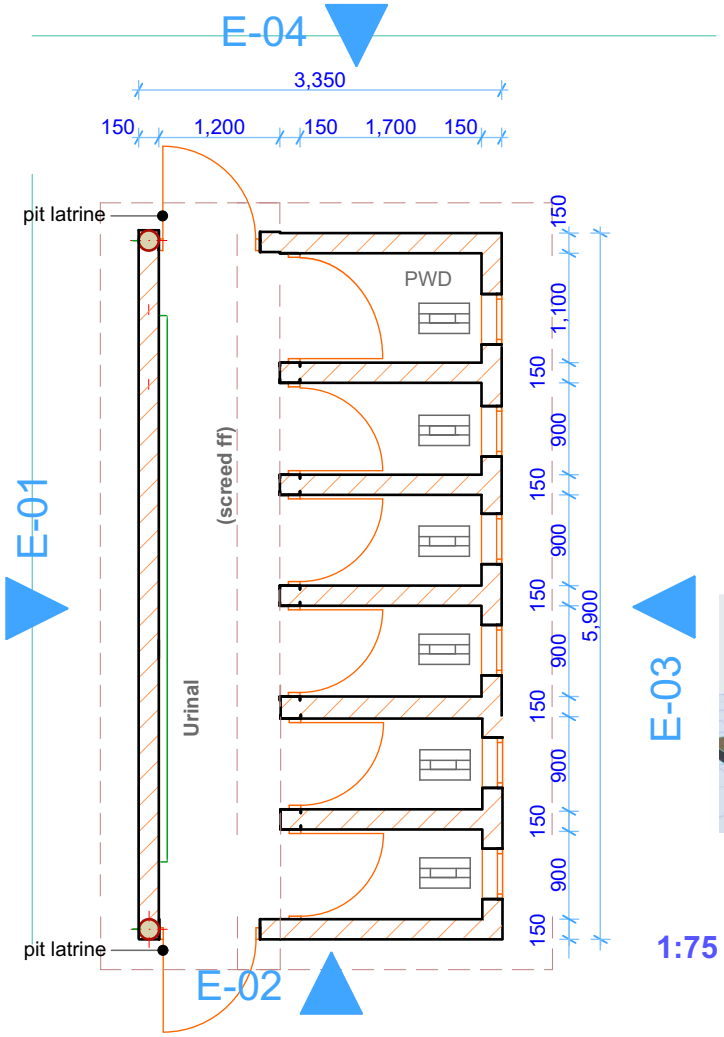

GROUND FLOOR PLAN

1:75

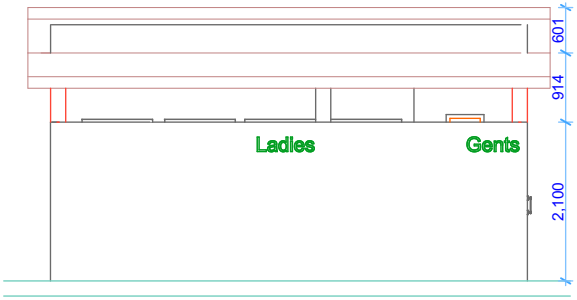

ELEVATION 01

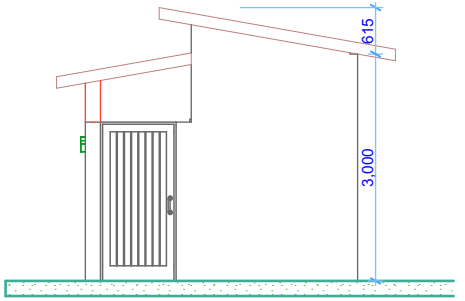

ELEVATION 02

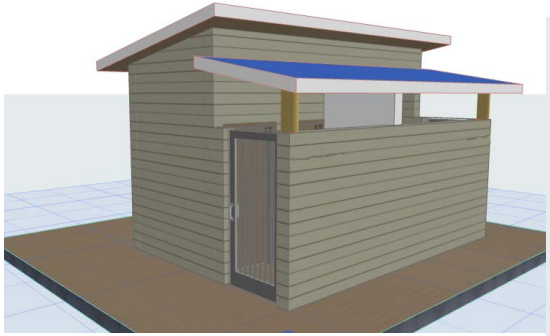

PERSPECTIVE VIEW 2

PERSPECTIVE VIEW 3

PERSPECTIVE VIEW 1

ELEVATION 03

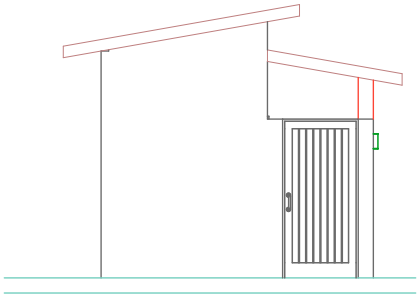

ELEVATION 04

NOTES

General

All dimension are shown in mm unless otherwise specified.
Drawings are not to be scaled.Only figured dimensions are to be used.
Contractor must check & verify all dimensions before commencement of work.

Construction

All slabs at ground level to be poured over 1000 gauge polythene sheeting on 50mm thick murram blinding on hardcore.
All soils under slabs & all around external foundation to be poised for termite control.

Structural

All black cotton soil to be removed from below all building and paved surfaces.
All paved surfaces to be clear of black cotton soil a distance of 500mm outside the edge of the surface.
For all R.C. works, refer to S.E.'s details.
Foundation depths to be determined on site and to S.E.'s approval.
All walls less than 200mm thick to be reinforced with hoop iron at every alternate course
All adjacent R.C. works and masonry walls to be tied strap irons at every altenate course

Mechanical

Drains passing beneath building & driveways to be encased in 150mm concrete sarround

The storm water drain pipes to comply with BS856.
Minimum slope in the drain pipes to be 1%.
No chases will be allowed in the slabs for pipes

No cutting of concrete without express approval of the Architect or S.E.All testing of pipes must be cordinated with electrical S any conflicts must be clarified before works begins.
P.V. denotes permanents vent.

Electrical

All conduits must be laid before plastering

--

revision suffix
date of revision
initials
revision details

architects

Job Architect J.M.N

Job Title

PROPOSED ABLUTION BLOCK AT

client

KAJIAMBAKI COMPREHENSIVE SCHOOL

drawing title

Job no.

Drawing no.

CI/SfB

Drawing suffix

Scale

Date

Drawn

J.M.N